

Impact Dot Matrix Printer

CD-S500/501/503

CITIZEN
Micro HumanTech

Leading Technology for Humanity



- 5.0 lines/sec high-speed printing
- 76.2 / 69.5 / 57.5mm selectable paper width
- Easy paper loading
- Logic-seeking control
- Optional interface cards
- Built-in AC adapter
- Black mark function (option)
- Cash drawer kick-out
- Memory switch function
- Build-in buzzer
- Bitmap data registration (NV memory)
- ESC/POS compatibility
- Page mode
- Two color printing
- 3 PLY paper printing capability
- Easy customization by software
- Availability in white or black
- High reliability and durability



CD-S500S
(Standard type)



CD-S501S
(With auto cutter type)
Available in Black



CD-S503S
(With auto
cutter/winder type)



Vertical solution

Applications

- Receipt
- Journal
- Ticket
- Daily report
- Kitchen
- Delivery

Type Classification

CD-S500 S RS E WH M1

1) 2) 3) 4) 5) 6)

- | | | |
|--|--|---|
| 1) Model type
CD-S500: Standard type
CD-S501: With auto cutter type
CD-S503: With auto cutter and winder type | 3) Interface
PA: Parallel IEEE1284
RS: Serial RS-232C
UB: USB | 5) Case Color
WH: Cool white
BK: Black |
| 2) Power source type
S: Built-in AC adapter type | 4) Region
E: Europe
U: North America | 6) Black mark sensor
None: No sensor
M1: Left sensor for paper front
M2: Right sensor for paper back
M3: Left sensor for paper front
M4: Right sensor for paper back |

Easy paper loading



Accessories

- Ink ribbon: IR-31B (Black)
- Ink ribbon: IR-31RB (Red/Black)



Accessories

Wall mount kit

WALL-CT300



Interface cards

Parallel




Serial



USB



Customization software for easy customization

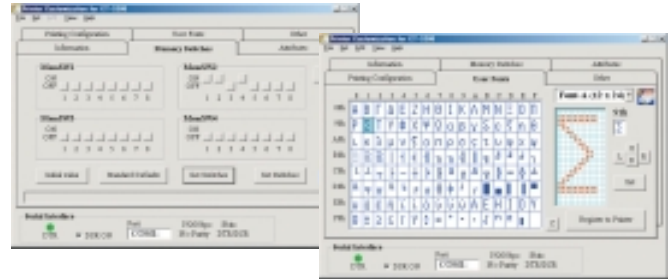

Specifications

Printing method	Serial dot impact (Logic-seeking control)
Printing direction	Bi-directional
Font	Font A: 7 × 9, 9 × 9 matrix
Number of columns	76.2mm paper : Font A-40/42 columns / Font B-33/35 columns 69.5mm paper : Font A-36/30 columns / Font B-38/31 columns (69.5mm paper width) 57.5mm paper : Font A-30/25 columns / Font B-31/26 columns (57.5mm paper width)
Printing speed	5.0 lines/sec at 76.2mm width+40 columns 5.4 lines/sec at 69.5mm width+36 columns 6.0 lines/sec at 57.5mm width+30 columns
Character size (W × H)	Font A: 1.25 × 3.12mm(7 × 9 dots), Font B: 1.57 × 3.12mm(9 × 9 dots)
Character set	Alphanumeric, International, Code page 437,850,860,863,865,852,866,857,858, WPC1252
Line spacing	4.23mm
Line feed speed	40 lines/sec
Paper feed method	Friction
Paper	76.2/69.5/57.5 ± 0.5mm × ø83mm Thickness:0.06-0.085mm(1 Ply) 1Ply/2Ply/3Ply copy paper 0.05 - 0.14mm(Copy paper cut) 0.05 - 0.20mm(Copy paper print)
Interface	Parallel(IEEE1284 compliant), or Serial(RS-232C), USB
Input buffer	4K/40 bytes
NV bit map data area	128K bytes
Drawer kick-out	2 drawers
Ink ribbon	Red/Black, Black, Purple, Cassette
Power supply	DC24V ± 7%
AC adapter	Input:AC 100-230V,1.3A Output:DC24V ± 5%
Weight	Approx.2.8kg(Standard type) 3.2kg(With auto cutter/winder type)
Dimensions (W × D × H)	156 × 247.7 × 174.4mm(Standard type/with auto cutter type) 156 × 277.7 × 197.8mm(Winder type)
Operating environment	0 - 50°C, 10 - 90% RH
Storage environment	-20 - 70°C, 5 - 90% RH
Reliability	Printer:MCBF 7.5 million lines Print Head:150 million characters Auto cutter:1,000,000 cuts
EMC and Safety standards	UL, C-UL, FCC classA, TUV-GS, CE marking

CITIZEN
Micro HumanTech

CITIZEN SYSTEMS JAPAN CO., LTD.

OVERSEAS SALES DEPT., SALES DIVISION :

6-1-12,TANASHI-CHO,NISHI-TOKYO-SHI,TOKYO 188-8511,JAPAN
Tel.(81)-424-68-4608 Fax.(81)-424-68-4996

<http://www.citizen-systems.co.jp>

e-mail : sales-op@systems.citizen.co.jp

CITIZEN is a registered trade mark of CITIZEN WATCH CO., LTD., Japan.

CITIZEN es una marca registrada de CITIZEN WATCH CO., LTD., Japón.

All specifications are subject to change without prior notice.

All trademarks or registered trademarks are the property of their respective owners.

Printed in Japan